


**UR 5803 / UR 5863
becomes**

UR 5803 / UR58630

**Casting polyurethane
elastomer**

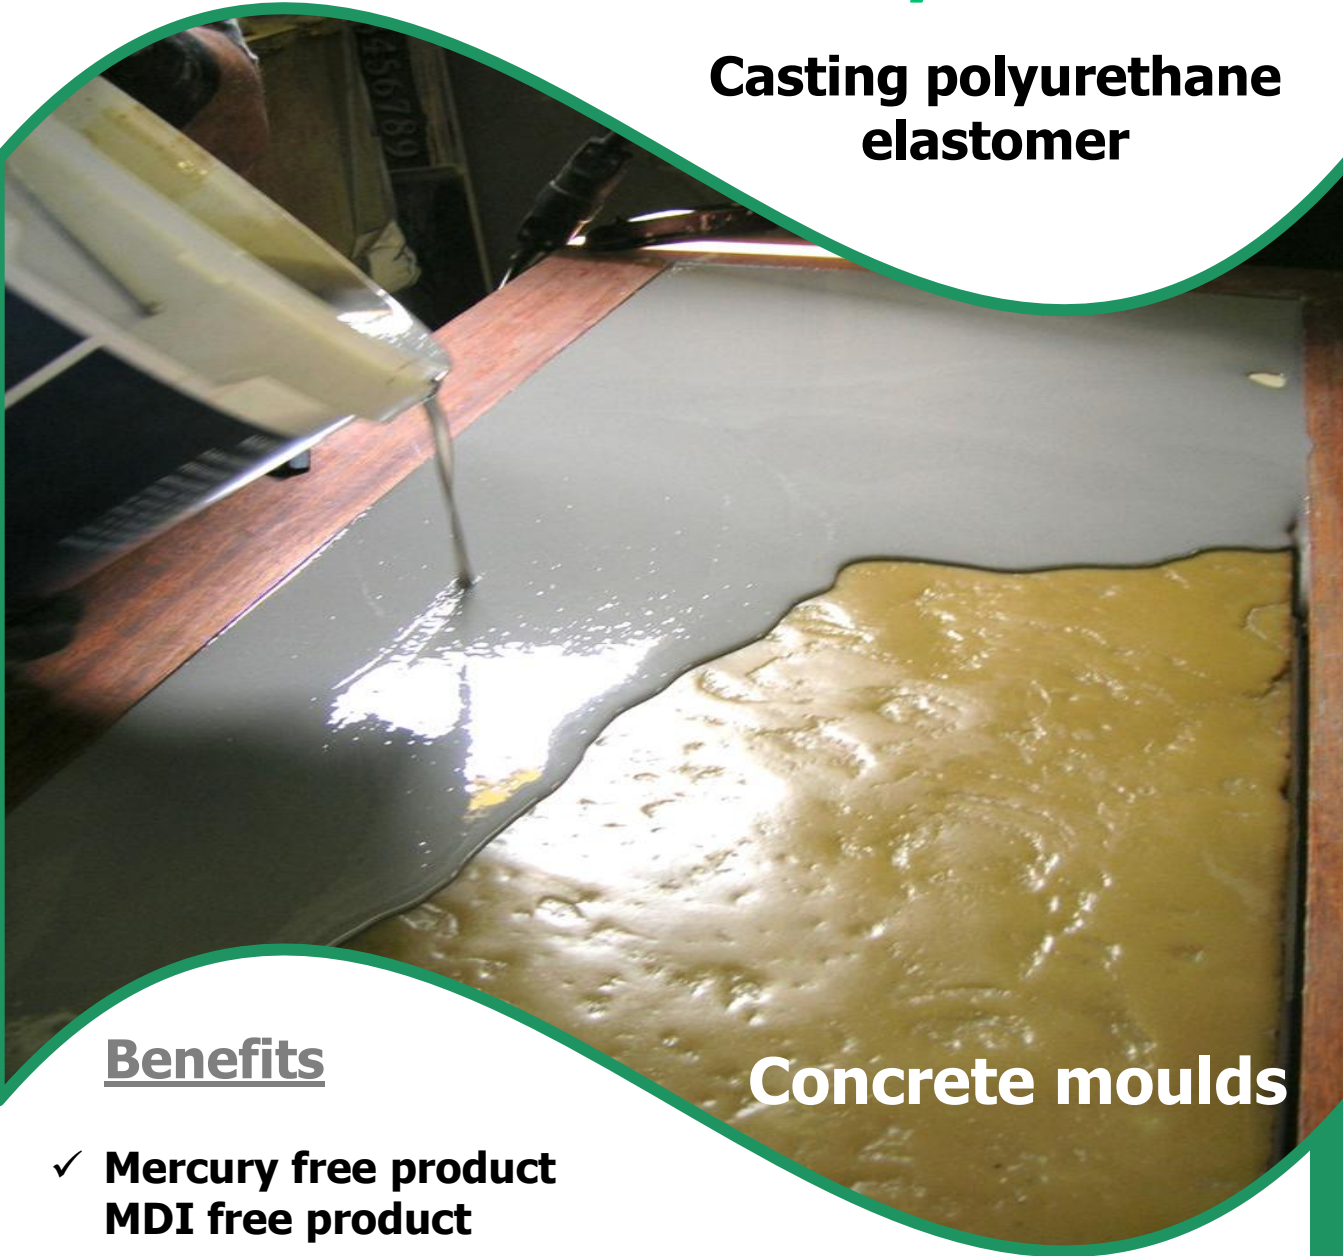

Benefits

Concrete moulds

- ✓ **Mercury free product**
MDI free product
- ✓ **High chemical resistance to demoulding agents**
- ✓ **2 reactivities and 2 colors available**
- ✓ **Better dimensional stability over time**

Properties

Compares to UR 5803 / UR 5863, **UR 5803 / UR 58630's properties** remain similar...:

- ✓ **20 min pot life for standard version;
30 min for slow version**
- ✓ **Demoulding time of 16 or 24 hr**
- ✓ **Same behaviour toward concrete demoulding agents**
- ✓ **Same kg price**



...with additional qualities :

- ✓ The product is available in **grey (non colourable)** and in **beige (colourable)** for **industrial applications**.
- ✓ **63 shore A hardness** makes it **the most suitable product for intensive production of concrete flat parts**: floor tiles, swimming pool borders, wall claddings, etc.
>> 1000 parts possible in a mould with non aggressive concrete release agent.

Packaging and References

DESIGNATION	PACKAGING	CODE
UR 5803 ISOCYANATE	1x5kg	08353
UR 58630 GY POLYOL (grey)	1x14.3kg	08426
UR 58630/S GY POLYOL (grey) version lente	1x14.3kg	08588
KIT UR 5803 / UR 58630	5kg+14.3kg	08587
UR 5803 ISOCYANATE	1x227,5kg	07977
UR 58630 BG POLYOL (beige)	1x200kg	08507